

HALON 1211

HALON 1211 is a liquefied gas, pressurized with nitrogen, which discharges as a vapor causing no cold or static shock and no impairment of the operator's vision. This "CLEAN" agent quickly penetrates difficult-to-see and hard-to-reach areas and leaves no residue. It is recommended for protection of delicate, sensitive, and expensive computers, electrical equipment, tapes and film, automotive and aircraft engines, laboratory chemicals and equipment.

RUGGED

- 1-Year Manufacturer's Warranty
- Stored Pressure Design
- Dependable Drawn-Steel Cylinders
- Durable High-Gloss Polyester Powder Paint
- All-Metal Valve Construction
- Temperature Range -65°F to 120°F

USER FRIENDLY

- Maximum Visibility During Discharge
- No Electrical Conductivity Back to the Operator
- No Thermal or Static Shock
- QR Coded and Multilingual Labels

CLEAN

- Leaves No Residue
- Reclaimed Halon 1211 is Restored to Original Military Specification
- Uses All Recycled Gas in Accordance With The Montreal Protocol

OPTION

- USCG Approved with Bracket Listed on UL Label (except model A344T)
- Chrome Cylinders (See Chart at left)

RECYCLED GASEOUS AGENT CERTIFIED TO MEET MILITARY SPECIFICATIONS.

AGENT TYPE	HALON 1211						
	Anodized Aluminum				Chrome Plated Brass		
VALVE TYPE	Nozzle				Hose		
DESIGN	Nozzle				Hose		
MODEL NUMBER	*A344T	*C352TS	*C354TS	B355T	B369	B371	361
UL RATING	2B:C	5B:C	5B:C	10B:C	1A:10B:C	2A:40B:C	4A:80B:C
CAPACITY (LBS.)	1.25	2.5	3	5	9	13	17
SHIPPING WT. (LBS.)	2.75	5.5	6	9.75	16.75	22	36.25
HEIGHT (IN.)	10	14.38	14.38	15.25	16.25	20.25	24
WIDTH (IN.)	3.63	4.5	6	5.75	8.5	8.5	9.75
DEPTH (IN.)	2.63	3	3	4.25	5	5	7
RANGE (INITIAL- FT.)	9-12	9-15	9-15	9-15	12-18	12-18	12-18
DISCHARGE TIME (SEC.)	10	10	12	10	9	14	22
OPTIONAL CHROME CYLINDER	Yes	Yes	Yes	Yes		Yes	
MINIMUM SPACE REQUIREMENTS (CU. FT.)	156	312	375	624	1123	1622	2120
NOMINAL OPERATING PRESSURE	100 PSIG	125 PSIG	195 PSIG	125 PSIG	195 PSIG	195 PSIG	195 PSIG
INCLUDED BRACKET	Vehicle	Aircraft	Aircraft	Vehicle	Wall	Wall	Wall


*SPECIAL VALVE DESIGN FOR AIRCRAFT INSTALLATIONS

MANUFACTURED AND TESTED TO UL STANDARDS

COMPLIES WITH NFPA 10 STANDARD
ISO-9001 AND ISO-14001 CERTIFIED UL LISTED

CONFORMS TO TEST STANDARDS:

UL 1093 & UL 711

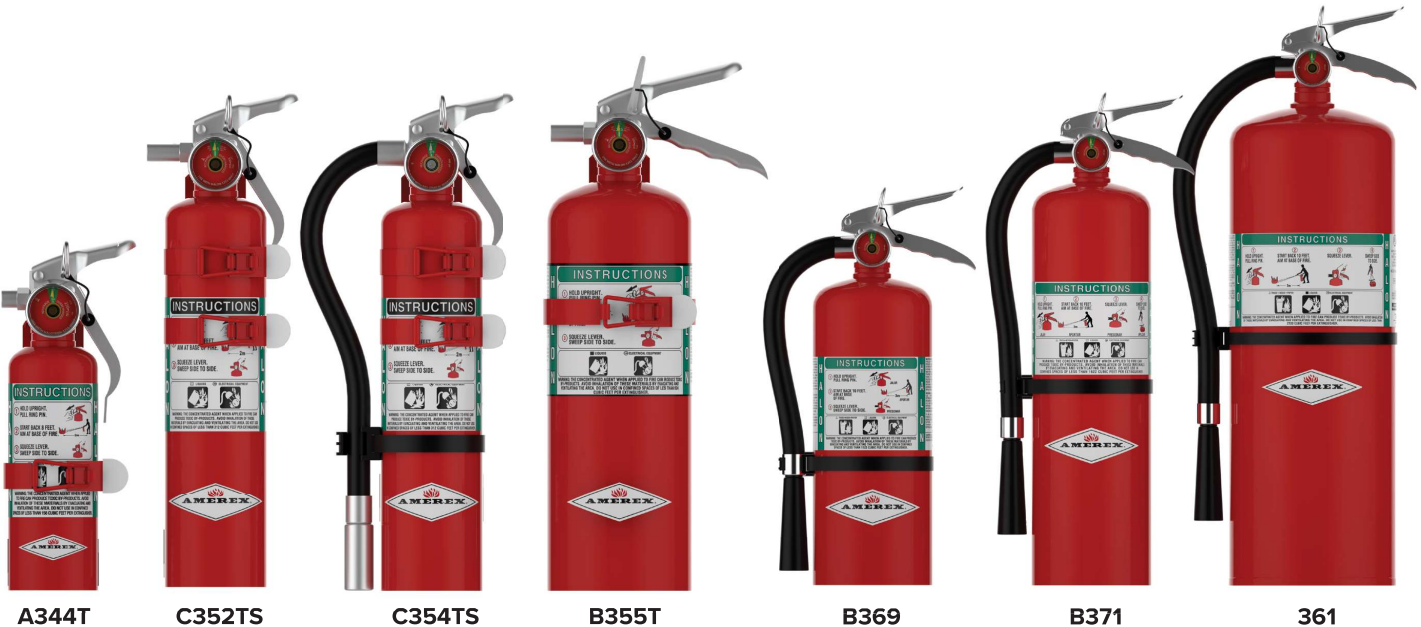

ALUMINUM VALVE



BRASS VALVE

