

PURPLE K DRY CHEMICAL

RUGGED

- 6-Year Manufacturer's Warranty
- Stored Pressure Design
- Dependable Drawn-Steel Cylinders
- Durable High-Gloss Polyester Powder Paint
- All-Metal Valve Construction

BRASS VALVE— HEAVY DUTY

- Chrome-Plated Brass Valve Body
- Stainless-Steel Handle & Lever

ALUMINUM VALVE— LIGHT TO MEDIUM DUTY

- Anodized Aluminum Valve Body
- Anodized Aluminum Handle & Lever
- Temperature Range -65°F to 120°F


USER FRIENDLY

- Easy and Economical to Maintain and Service
- QR Coded and Multilingual Labels

OPTION

- USCG Approved with Bracket Listed on UL Label
- Chrome Cylinders (See Chart Below)

PURPLE K extinguishers contain specially fluidized and siliconized potassium bicarbonate dry chemical which is particularly effective on Class B flammable liquids and pressurized gases and Class C electrical fires. It is electrically non-conductive. **PURPLE K** has been the choice of oil, gas, chemical and utilities industries as the preferred fire-fighting agent.

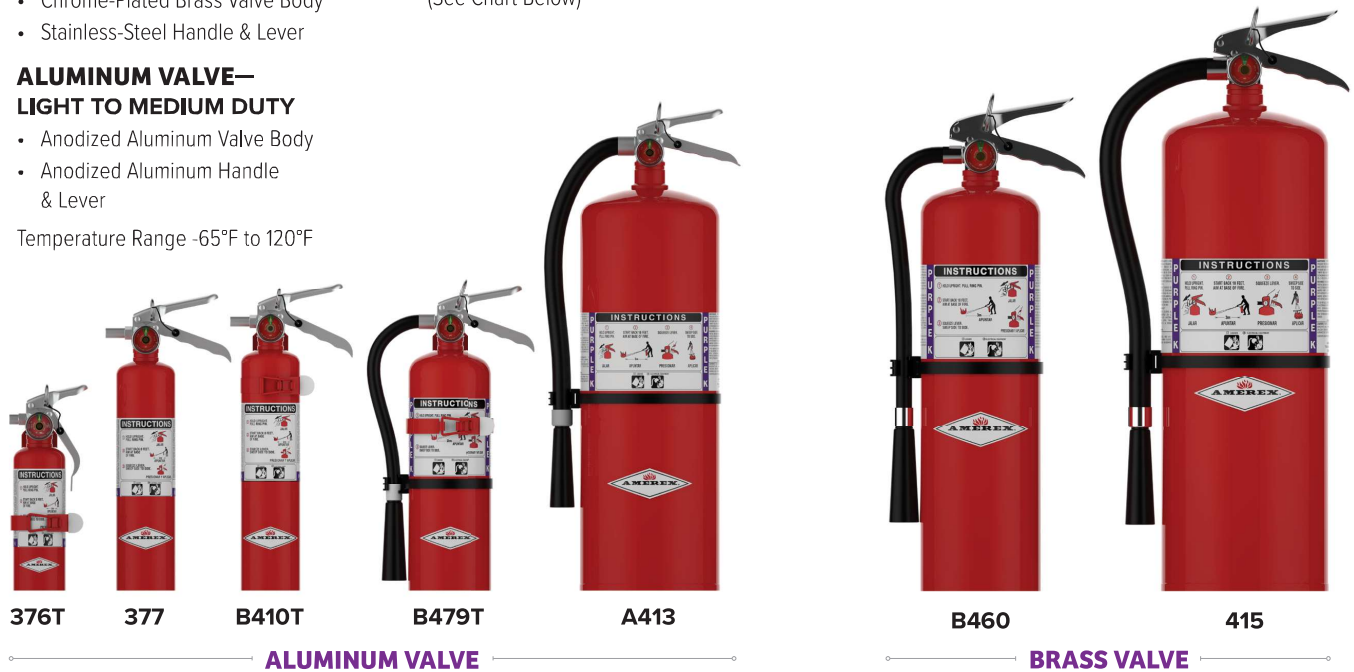

MANUFACTURED AND TESTED TO ANSI/UL STANDARDS
COMPLIES WITH NFPA 10 STANDARD
ISO-9001/ ISO-14001 CERTIFIED UL LISTED

CONFORMS TO TEST STANDARDS:
CAN/ULC-S504 - UL 299 &
CAN/ULC-S508 - UL 711

AVAILABLE IN WHEELED EXTINGUISHERS



LARGEST SELECTION OF SIZE AND EXTINGUISHER OPTIONS AVAILABLE.

AGENT TYPE	PURPLE K DRY CHEMICAL						
VALVE TYPE	Anodized Aluminum					Chrome Plated Brass	
DESIGN	Nozzle			Hose & Nozzle			
MODEL NUMBER	376T	377	B410T	B479/B479T	A413	B460	415
UL & ULC RATING	2B:C	10B:C	10B:C	30B:C	120B:C	80B:C	120B:C
CAPACITY (LBS.)	1	2.5	2.5	5	20	10	20
SHIPPING WT. (LBS.)	2.25	5.5	5.5	9.5	36.4	19.5	38
HEIGHT (IN.)	10.25	14.79	15.5	15.25	24	20.5	24
WIDTH (IN.)	3.94	5.5	5.5	7.25	10.25	8.75	10.25
DEPTH (IN.)	2.63	3	3	4.25	7	5	7
RANGE (INITIAL- FT.)	5-8	5-8	9-15	12-18	15-21	15-21	15-21
DISCHARGE TIME (SEC.)	8.5	8.5	9.5	12	28	22	28
OPTIONAL CHROME CYLINDER	Yes		Yes	Yes		Yes	
NOMINAL OPERATING PRESSURE	125 PSIG	195 PSIG	195 PSIG	195 PSIG	195 PSIG	195 PSIG	195 PSIG
INCLUDED BRACKET	Vehicle	Wall	Vehicle	Wall/Vehicle		Wall	